



CRAFT II

THE POWER PACK THAT LASTS



Left: CRAFT II plus - the unbeatable power pack.

Protective shield made from a single mould: CRAFT II plus is created using the aluminium die-casting process. The luminaire is distinguished by its impressive resilience and revolutionary thermal management - even when faced with challenging ambient temperatures and extreme mechanical or chemical stresses.

Right: CRAFT II performance - the robust lightweight.

Sustainably produced, powerful in action: housed in a lightweight yet sturdy sheet steel housing, the CRAFT II performance is a highly efficient high-bay luminaire. Extremely versatile thanks to six different light distribution curves. And with housing "Made in Germany", in a zero carbon production process.



CRAFT II PLATFORM


CREATED FOR CHALLENGING ENVIRONMENTS

CRAFT II – is not just two powerful new high-bay luminaires. CRAFT II is more than that: it's the first generation of Zumtobel high-bay luminaires based on the platform principle. Not a fixed stand-alone solution, but a tailor-made system. Maximum performance. And perfectly adapted to the requirements of the relevant operation.

REVOLUTIONARY THERMAL MANAGEMENT

The CRAFT II plus uses two fundamental principles of physics, the Venturi effect and the Coandă effect, to cool and clean itself. The result: the innovative high-bay luminaire is in a completely different class from its predecessor model and can withstand high ambient temperatures (up to 70°C) – throughout its entire life time of around 100 000 hours. To achieve this, CRAFT II plus relies on an intelligent interplay of air pressure, air speed and air temperature. And all in an aluminium housing with excellent thermal conductivity.



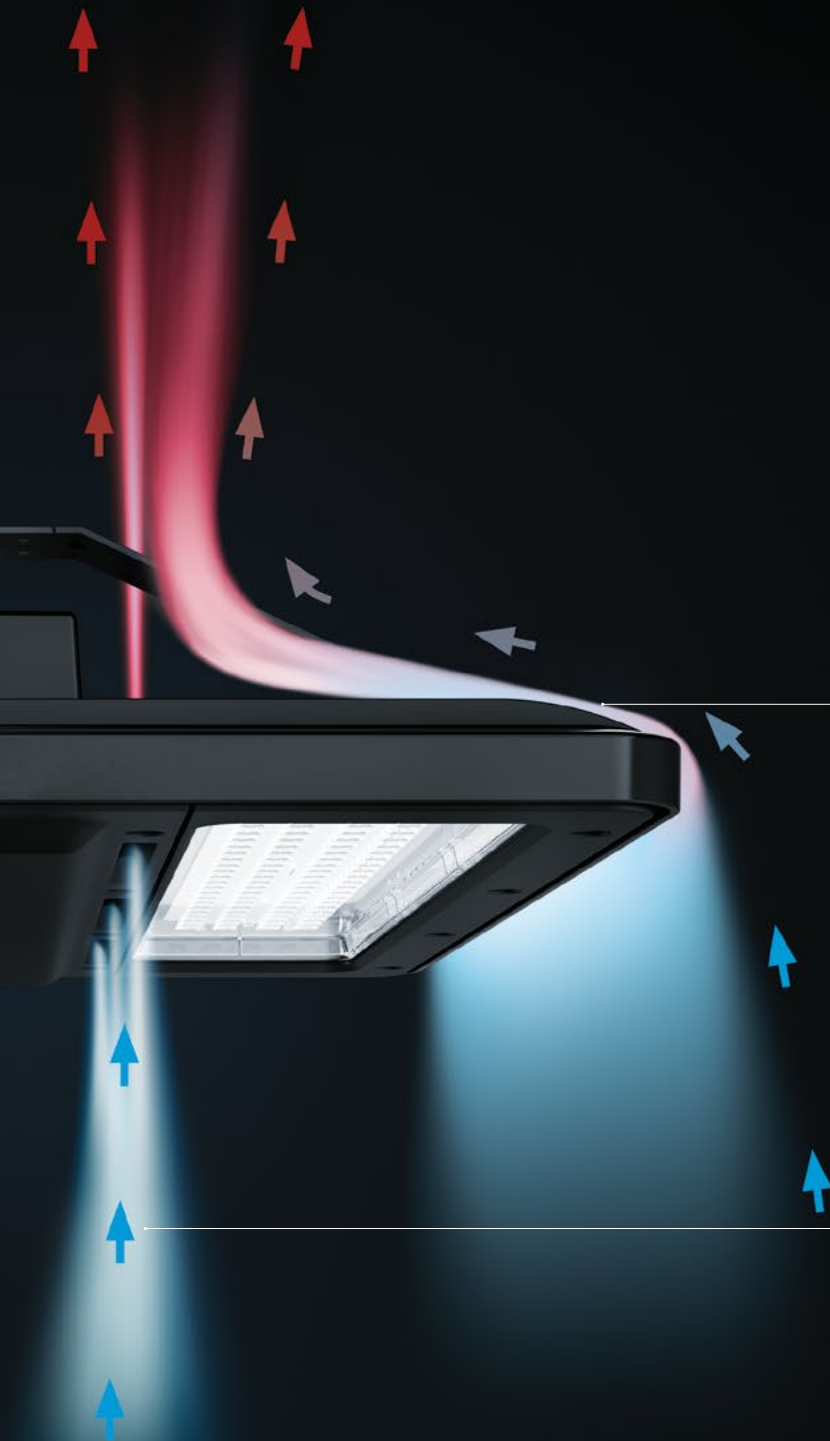


Self-cleaning thanks to the Coandă effect.

The Coandă effect is a principle of physics used in the aviation industry and applied to CRAFT II plus: a pressure imbalance presses the airflow against the curved surface of the luminaire. This efficiently cools the LED boards in particular. At the same time, the airflow also removes everyday dust from the surface of the luminaire.

Efficiently cooled thanks to the Venturi effect.

Specially designed nozzles in the body of CRAFT II plus generate negative pressure - and thus ensure that the air circulates at a high speed between the LED drivers and LED boards. The so-called Venturi effect cools the CRAFT II plus luminaire very efficiently and allows the power pack to be operated even at extremely high ambient temperatures.

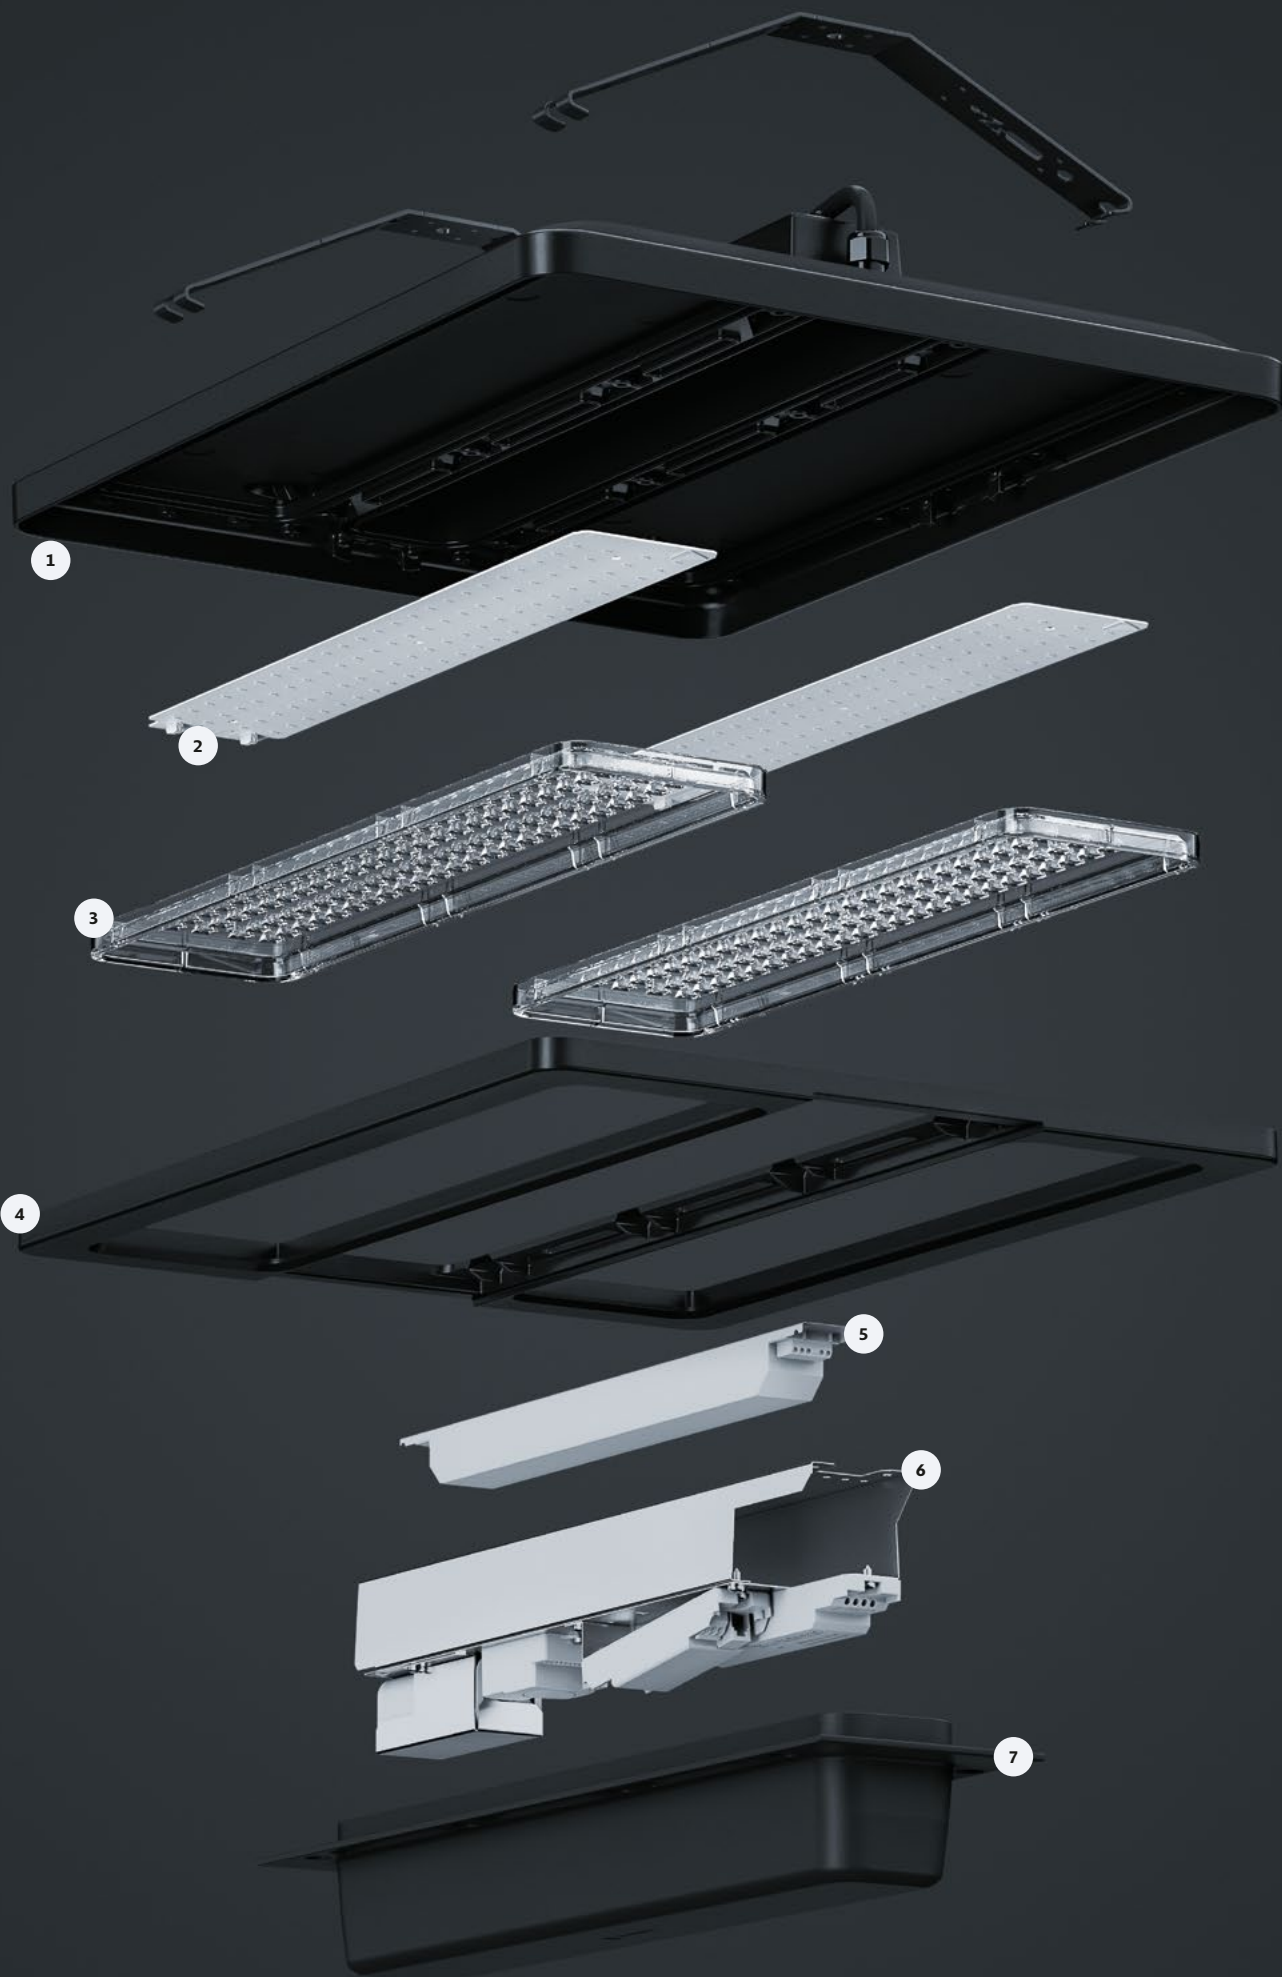

RESILIENT POWER PACK

Whether in heavy industry, in agriculture, in swimming pools or gymnasiums – wherever extreme chemical and mechanical stresses are at play, the strengths of the CRAFT II plus really come into their own. Tough. Strong. Resilient. And housed in a high-quality aluminium housing. The CRAFT II plus luminaire is particularly impact-resistant thanks to a glass fibre-reinforced polyamide cover for the electronic components and thanks to diffusers, which are resistant to chemical and mechanical stresses.

1

Housing

Impact- and corrosion-resistant aluminium housing with copper content reduced by 80%, powder-coated for special surface strength and maximum protection in challenging environments.

2

LED boards

LED boards designed for a very long life time, and premium-quality LED chips, with increased resistance to moisture, temperature and chemicals.

3

Diffusers

Resistant to chemical influences and mechanical stresses, available in polycarbonate, PMMA or CHEMO.

4

Frame

A solid frame made of the same material as the housing protects the main internal components and ensures optimum protection of the sealing elements.

5

LED drivers

Industrial LED drivers specially developed for CRAFT II for increased safety, thanks to sturdy design and extensive testing under extreme conditions, high reliability thanks to the selection of premium-quality components.

6


Connectivity and sensors

There are several sensor technology options to choose from for maximum convenience and efficiency in a wide range of application areas: microwave sensors detect presence or absence and all variants can be operated via DALI or wirelessly. Even IoT integration is possible.

7

Cover for electronic components

Impact- and corrosion-resistant, made of glass-fibre-reinforced polyamide, for optimum transmission of radio waves from Bluetooth® devices and sensors.

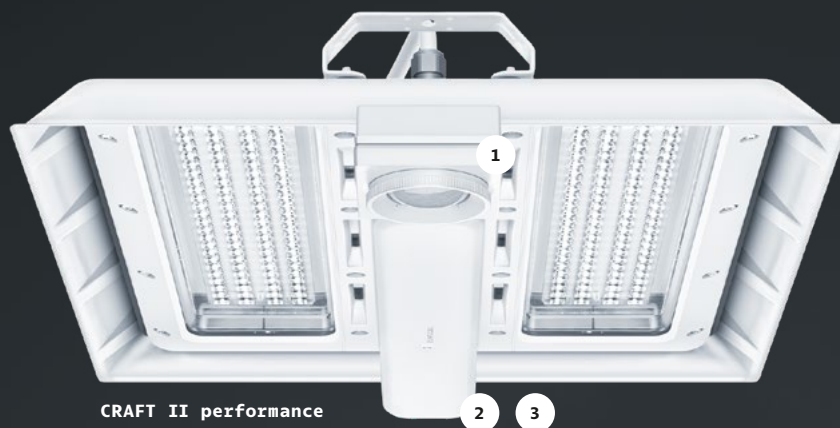

CRAFT II performance



CRAFT II plus

1

PIR multi-sensors detect ambient light and presence from a height of 8 to 16 metres. This data can be used for maximum energy savings.

CRAFT II performance luminaires also come with a PIR standalone sensor (PIRILD) and an IR remote control. A PIR sensor, which allows wireless communication via Bluetooth® for presence and daylight sensor technology, is available as a further option (PIRBC).

2

Microwave sensors (MWS) combine presence detection from a height of 5 to 12 metres with IP66 protection and an IK08 impact resistance rating. A highly resistant luminaire can therefore significantly reduce energy consumption.

The MWDABC microwave sensor option adds to the advantages listed above by allowing wireless communication via Bluetooth®.

3

With BC Bluetooth® Wireless Control modules, the luminaire is embedded in a dimmable and groupable **basicDIM Wireless** solution for individual rooms.

Bluetooth® mesh network

up to 15 m distance between luminaires

up to 20 m distance from mobile control device

up to 250 wireless nodes per network

any number of networks




4remoteBT app
to operate a
basicDIM Wireless solution
(Casambi ready)

GOOD INTELLIGENCE PROTECTION

Resistant and intelligent. The new generation of CRAFT II luminaires provides several options for conveniently saving a lot of energy. Presence- and daylight-controlled. Not only in new builds but also in refurbishment projects. Cost-effective and even wireless if required. Luminaires and sensors can be wirelessly integrated, grouped and controlled. Even networking in the Internet of Things is possible. The required IoT modules are simply built into the luminaire.

ENERGY SAVING POTENTIAL

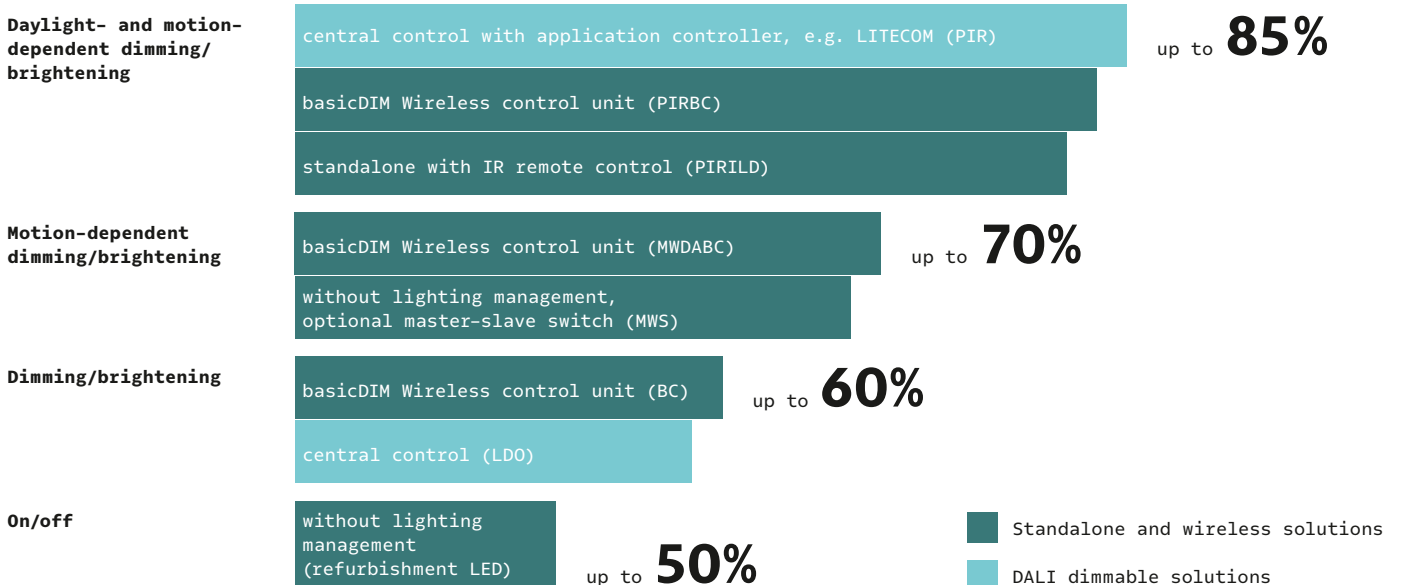



CRAFT II plus

PROTECTIVE SHIELD FROM A SINGLE MOULD

CPS – three letters, one promise: the so-called CRAFT PROTECTION SHIELD provides the CRAFT II product family with a type of protective shield for challenging industrial environments.

In both the aluminium and sheet steel variants, the housing is made from a single mould. Zumtobel thus guarantees that sensitive components such as sensors, emergency or IoT technology are completely covered and also prevents water from getting into the luminaires.

On conventional high-bay luminaires, screws on the top mean that there is a danger of moisture and chemicals getting into the housing from above. The CRAFT PROTECTION SHIELD eliminates potential entry points on the top of the luminaire.

All screw connections on CRAFT II performance and CRAFT II plus are on the underside of the luminaire and thus completely covered by the innovative CPS. A protective shield that is as simple as it is effective.





CRAFT II performance

HIGH-PRESSURE CLEANING

Attractive appearance, minimal cleaning effort: the clear housing design with smooth surfaces and rounded corners prevents water or dirt from accumulating on the luminaires of the CRAFT II product family. But does dust still sometimes need to be removed? The smooth surface (CRAFT II performance) and the large distance between the ribs on the high-bay luminaire (CRAFT II plus) makes it easy to clean the luminaires by hand with a cloth.

CRAFT II luminaires are supplied with water protection class IP66 as standard. Those who want to bring out the heavy guns, for example a high-pressure washer, can do this for the CRAFT II plus luminaire without hesitation. This can be supplied with IP69 via myCRAFT II on request. This maximum degree of protection is made possible by


the CRAFT PROTECTION SHIELD and the innovative sealing system, which places all sealing channels at the same level. For the CRAFT II plus, these come with a corrosion-resistant liquid seal, which follows the shape of the sealing components. Maximum protection. Even at maximum water pressure.

	CRAFT II performance	CRAFT II plus
Housing material	galvanised steel plate (powder-coated)	die-cast aluminium
Protection class	IP66	IP66 IP69 via myCRAFT II




LIGHT QUALITY FROM ZUMTOBEL


The CRAFT II product family doesn't just make use of pioneering technologies, it also benefits from the extensive project experience and in-depth lighting expertise of the Zumtobel Group. For example, the optics engineers have replicated a natural phenomenon called TIR – total internal reflection. Transparent, laser-structured lenses with a micrometrically small, diagonal dome-like structure reflect the whole ray of light like a mirror. This distributes the light rays optimally in the room – precise and highly efficient.




Wide Beam
(WB)




Wide Beam
Controlled Glare (WBCG)




Very Wide Beam
(VWB)




Narrow Beam
(NB)



Narrow Beam
Controlled Glare (NBCG)



Extrem Narrow
Beam (XNB)



Asymmetric Beam
(AB)



Without controlled glare optic



With controlled glare optic

CONTROLLED GLARE OPTIK

But that's not all. The CRAFT II product family also offers a very elegant solution to a common problem in all high-bay luminaires: their glare or perceived glare. This occurs for example in a logistics setting or in sport – especially in any situations in which people look up and directly into the light from a high-bay luminaire. For these situations, Zumtobel has devel-

oped an innovative "controlled glare optic". An integrated louvre enhances the appearance of the CRAFT II performance or CRAFT II plus luminaires and creates two additional light distribution options: "narrow beam controlled glare" and "wide beam controlled glare". These are extremely effective in reducing glare to a minimum and enable a UGR < 19.

DESIGNED FOR CIRCULAR PRODUCT CYCLES. AND SUSTAINABLE GROWTH.

Holistic sustainability? It's deeply anchored in the CRAFT II DNA – thanks to the Zumtobel Circular Design Rules (CDR).

Developed for the circular economy. Designed for the requirements of tomorrow – and even further. CRAFT II is particularly attractive if you want to consider green building standards for your building: because you can only improve sustainability if you measure it.

Zumtobel Circular Design Rules (CDR)

Initiated in collaboration with consultants EPEA Switzerland and the EOOS design studio. The Zumtobel Group's Circular Design Rules (CDR), which have undergone significant further development within the company and have been integrated into the product development process, are setting new standards for the circular economy: from sustainable procurement processes and innovative product design to smart systems for maintenance, remanufacturing and recycling – a well-thought-out concept for a circular future.

Six criteria.

One clear vision.



The analysis shows: CRAFT II meets top Circular Economy standards. It's made from partwise recycled, durable and reusable materials. Designed for easy disassembly. Developed for maintenance and upgrades, including refurbishment kits, spare parts, and corresponding services, as well as additional circular options.



CRAFT II PLUS M17-840 PC WB LDO
(42187254)



CRAFT II PERFORMANCE M17-840 PC WB LDO
(42187590)

**CIRCULAR SOURCING******CIRCULAR DESIGN****CIRCULAR SYSTEMS****CRAFT II PLUS M17-840 PC WB LDO (42187254)*****Recycled Material**

% of recycled material

**73 %**

The product is made with 73 % recycled material with a body made from 98 % recycled aluminum

Design for Disassembly

% of disassemblable parts

**100 %**

Components can be easily dismantled non-destructively. Enables circular systems.

Maintenance, Repair, Upgrade

Availability of the solution

**70 %**

CRAFT II can be serviced, modified, or enhanced by the customer.

Recyclability

% of recyclable materials

**80 %**

At the end of the product's lifetime 80 % of the materials are recyclable.

Design for Durability

% of reusable materials

**96 %**

Almost all components are ready for remanufacturing, supporting a circular systems solution.

Reuse, Remanufacturing

Availability of the solution

**50 %**

Pilot project for CRAFT II is planned.

CRAFT II PERFORMANCE M17-840 PC WB LDO (42187590)***Recycled Material**

% of recycled material

**27 %**

The product is made with 27 % recycled material, supporting a circular approach.

Design for Disassembly

% of disassemblable parts

**100 %**

Components can be easily dismantled non-destructively. Enables circular systems.

Maintenance, Repair, Upgrade

Availability of the solution

**70 %**

CRAFT II can be serviced, modified, or enhanced by the customer.

Recyclability

% of recyclable materials

**67 %**

At the end of the product's lifetime 67 % of the materials are recyclable.

Design for Durability

% of reusable materials

**95 %**

Almost all components are ready for remanufacturing, supporting a circular systems solution.

Reuse, Remanufacturing


Availability of the solution

**50 %**

Pilot project for CRAFT II is planned.

* Product information based on CDR calculation referenced product

** Disclaimer: Circular sourcing calculation based on product weight. Material data based on available supplier information (02/2025)

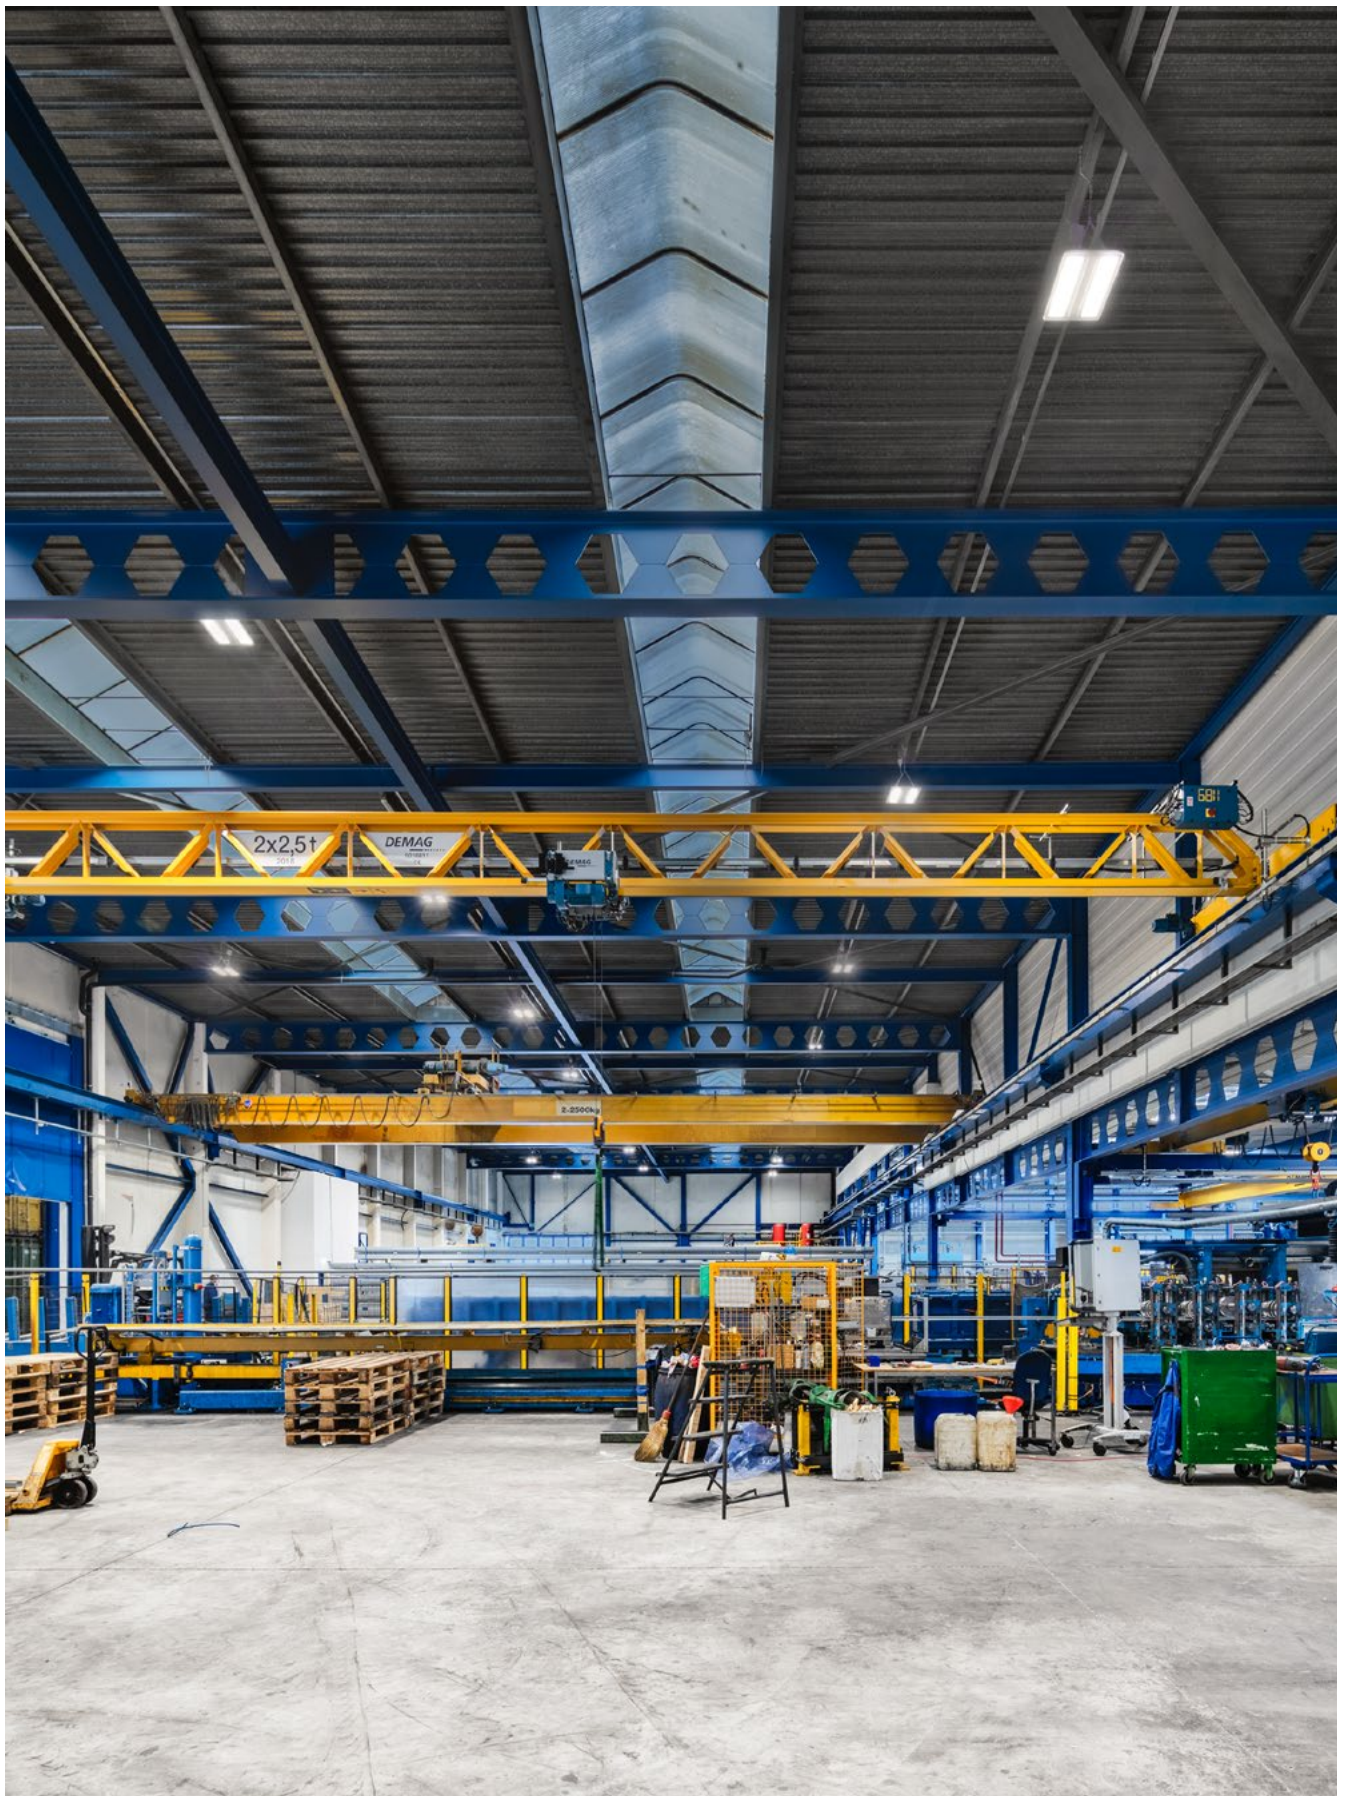




Intercable Arena, Bruneck | IT




Reitsporthalle Estermann (equestrian centre), Hildisrieden | CH

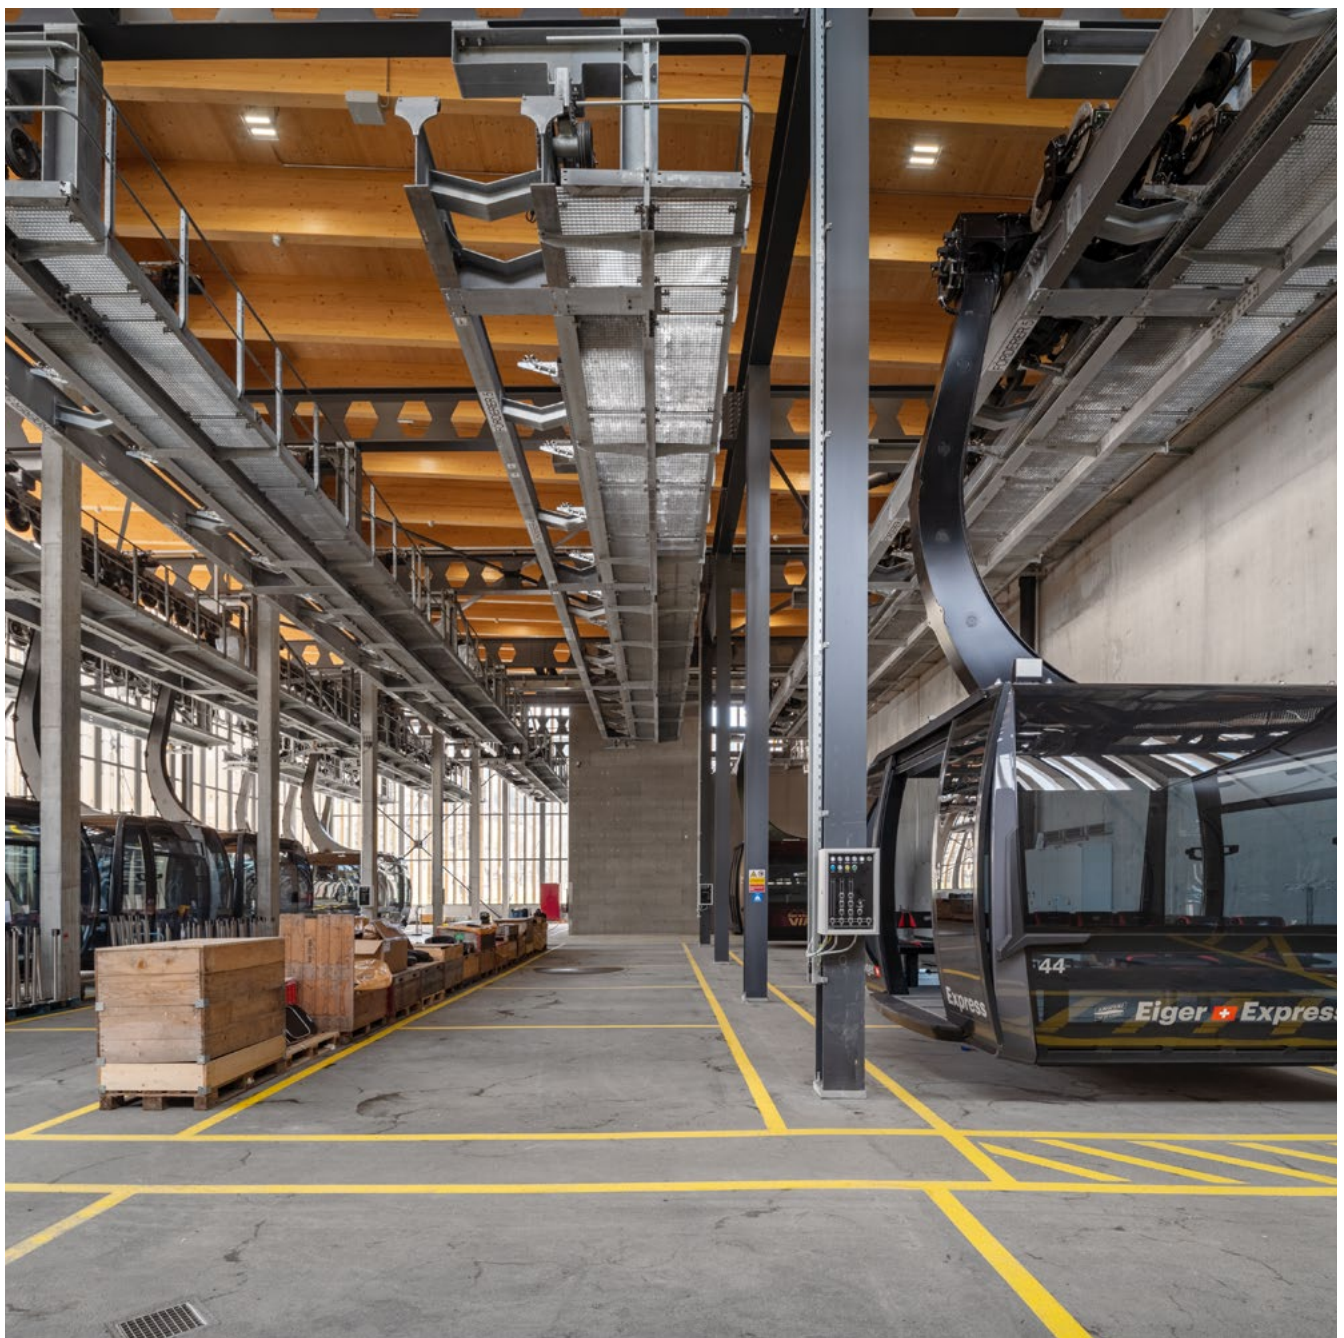

V-Cableway, Grindelwald | CH



InoBat, Bratislava | SK

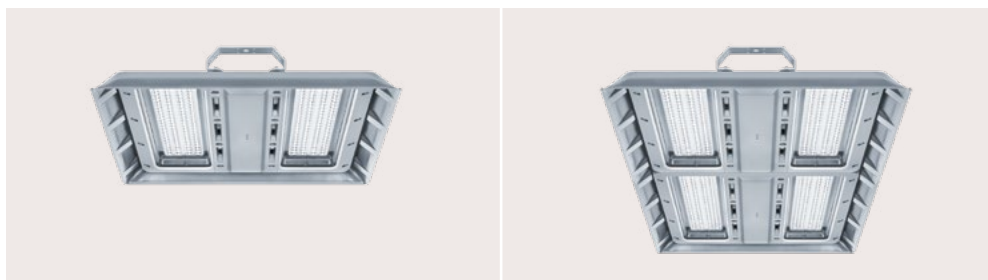CRAFT II PERFORMANCE M**CRAFT II PERFORMANCE L**

Mounting type	Surface-mounted (ceiling, wall) Suspended (chain suspension, cord suspension, vertical cable suspension) Recessed TECTON compatible Trunking	
Dimension	540 x 470 x 77 mm	1045 x 470 x 77 mm
Luminaire luminous flux	10 000 lm, 13 500 lm, 17 500 lm, 21 000 lm	20 000 lm, 27 000 lm, 35 000 lm, 42 000 lm
Colour temperature	3000 K, 4000 K, 5000 K, 6500 K, Balanced White 3000–6500 K (on request)	
Luminaire efficiency	up to 190 lm/W	
Typical applications	Logistics, retail, automotive, manufacturing	
Housing material	Galvanized steel sheet (powder coated)	
Light distribution	Wide Beam, Wide Beam Controlled Glare, Very Wide Beam, Narrow Beam, Narrow Beam Controlled Glare, Extrem Narrow Beam, Asymmetric Beam	
Controls	Switchable, DALI, basicDIM Wireless solution (Casambi ready, based on Bluetooth® Low Energy protocol) with remoteBT app for operation	
Sensors	Presence (5–12 m): MWS microwave sensor MWCF microwave sensor with corridorFUNCTION MWDABC microwave sensor for basicDIM Wireless solution Presence (8–16 m) and ambient light: PIR multi-sensor for central control PIRBC sensor for basicDIM Wireless solution PIRILD standalone sensor with IR remote control	
Emergency	Self-contained (E3, E3D, E3DUK) Central supply Self-contained with long-life LFP battery	
Temperature range	–25 °C to +65 °C	

CRAFT II PLUS M**CRAFT II PLUS L**

Surface-mounted (ceiling, wall)
 Suspended (chain suspension, cord suspension, vertical cable suspension)
 Recessed
 TECTON compatible
 Trunking

518 x 414 x 109 mm

1025 x 414 x 109 mm

10 000 lm, 13 500 lm, 17 500 lm, 25 000 lm

20 000 lm, 27 000 lm, 35 000 lm, 50 000 lm

3000 K, 4000 K, 5000 K, 6500 K, Balanced White 3000–6500 K (on request)

up to 195 lm/W

Metal processing, heavy industry, wood, textile, chemical production,
 cool logistics, Food industry (FI)

Aluminium die-cast

Wide Beam, Wide Beam Controlled Glare, Very Wide Beam, Narrow Beam,
 Narrow Beam Controlled Glare, Extrem Narrow Beam, Asymmetric Beam

Switchable, DALI, basicDIM Wireless solution (Casambi ready, based on Bluetooth®
 Low Energy protocol) with remoteBT app for operation

Presence (5–12m):
 MWS microwave sensor
 MWCF microwave sensor with corridorFUNCTION
 MWDABC microwave sensor for basicDIM Wireless solution

Self-contained (E3, E3D, E3DUK)
 Central supply
 Self-contained with long-life LFP battery

–40 °C to +70 °C

**Video CRAFT II**

T H E L I G H T



#75YEARSZUMTOBEL

zumtobel.com/contact