




EVIO II

A LUMINAIRE FAMILY. MAXIMUM DESIGN FREEDOM.

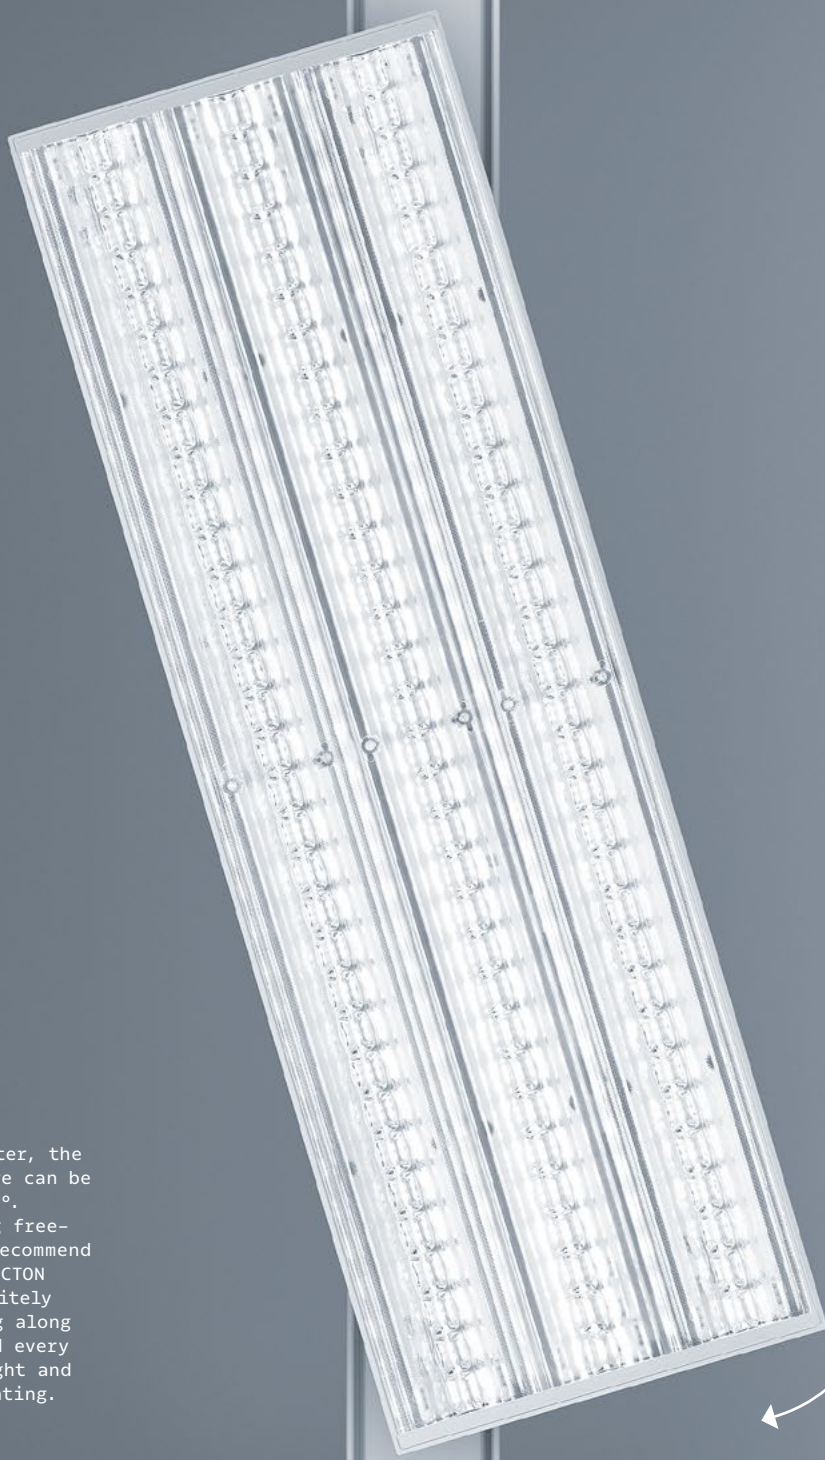

Depending on the adapter, the EVIO II panel luminaire can be rotated by 260° to 300°. For even more planning freedom with EVIO II, we recommend combining it with a TECTON track: 11 poles. Infinitely variable power tapping along the entire length. And every application - from light and sensors to safety lighting.

up to
300°

THE BEST LIGHT, MAXIMUM PLANNING FREEDOM


Two options – two equally diverse ranges of possibilities: with the EVIO II, we offer light in two different forms for two different infrastructures. Whether for the TECTON continuous-row lighting system or for your three-phase track. Whether as a slim line or as a flat panel luminaire. Whether for supermarkets or shops. Whether for aisle or shelf lighting. Wherever retail companies present themselves in the best light, the EVIO II impresses with its flexible design options: this is guaranteed by the different combinations of optics and the rotatable panel.

NEXT LEVEL OF LIGHT FOR RETAIL

Unrivalled compatibility: EVIO II is suitable for all retail spaces that want to combine an existing light infrastructure with optimised lighting or that are planning a new state-of-the-art installation. Whether as a slim line or a compact panel luminaire: EVIO II takes your retail property to the next level of light. It can also be combined with spotlights – for a perfect mix of area and accent lighting.

ONE LUMINAIRE FAMILY, NUMEROUS ADVANTAGES

High cost efficiency, uniform light distribution, flexible utilisation options, attractive design, rapid availability: whatever you need for your retail location, we can get it on track. From technical purchasing and lighting design to architecture and end customers: one luminaire family, everyone benefits.



EVIO II PANEL



EVIO II LINEAR



EVIO II PANEL

Ideal for larger areas requiring uniform lighting. Especially suited for retail environments like supermarkets and large sales areas, where a consistent light distribution is essential. The large panel provides smooth, even light distribution, minimises shadows, and creates a bright, welcoming atmosphere for customers.



EVIO II LINEAR

Perfect for narrow, focused lighting requirements. Ideal for areas such as shelves or aisles, where precise lighting is needed. The slim, linear design allows for easy installation and provides targeted illumination that highlights products without causing glare.



L95: long-lasting light quality. More than 11 years in use, an almost unchanged performance: even after 100 000 operating hours, EVIO II still achieves 95 per cent of its original luminous flux level.

The unique split-lens technology based on TECTON distributes targeted light from the centre to the lateral edges. EVIO II therefore appears much less dazzling while the light-emitting surface is more homogeneous. Another advantage of the split lens is that all common light distribution curves can be created with the same appearance - regardless of whether the lighting is narrow-beam or wide-beam. Precise light meets maximum efficiency. For your sustainable retail success.

Beam Characteristics



Wide Beam



Very Wide Beam




Narrow Beam



Shelf Beam



Wide Shelf Beam



Depending on the adapter, the EVIO II panel luminaire can be rotated by 260° to 300°. This means that the lighting infrastructure can also be installed perpendicular to the shelving in the shop. This has several advantages: the light is distributed particularly evenly on the front of the shelves, items are optimally visible and shadows are reduced to a minimum.

As a panel luminaire, it combines variable light distributions in one smart tool. Shelving row on the right, middle aisle, shelving row on the left: three separate positions that can be used with five different optics in 14 possible combinations. For perfectly illuminated action areas, shelving rows and products, reduced glare and highly effective use of light. From Very Wide Veam to Narrow Beam - maximum flexibility in one product.



EVIO II linear version in black colour
on 3-phase power track


EVIO II PANEL**EVIO II LINEAR**

Dimensions	512 mm x 168 mm x 97 mm	1498 mm x 60 mm x 16 mm
Light sources	Surface lighting with highly efficient 64 Mid-Power LEDs per segment	
Luminous flux	5500 lm, 8000 lm	
Installation	3-phase power track, TECTON continuous-row system	3-phase power track
Rotatability	Panel light 300° rotatable (3GU), panel light 260° rotatable (TEC)	
Colour rendering	CRI > 80	
Colour temperature	5000 K	
Beam characteristics	Narrow Beam, Wide Beam, Very Wide Beam, Shelf Beam, Wide Shelf Beam Different beam types can be combined in a single product (panel only)	
Control	switchable, DALI dimmable	
Housing colour	<div> <div></div> White <div></div> Black </div>	



EVIO II panel version in white colour
on TECTON track

T H E L I G H T

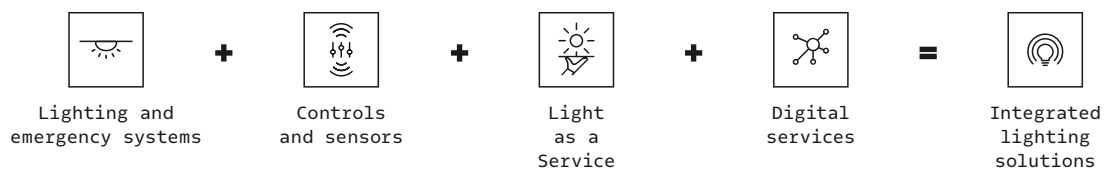

zumtobel.com/contact